



# TJ High Back Front Seat Cover Installation Instructions

For: TJ Wrangler, 1997 - 2002

Part Number: 29226



www.bestop.com



## WARNING

DO NOT remove the seats from the vehicle to install this product.

## Parts List

Seat Covers

Qty - 2



## WARNING

This product is designed to enhance the appearance of the vehicle. Do not rely in any way on the components of this product to contain occupants within the vehicle, or to protect against injury or death in the event of an accident. Never operate vehicle in excess of manufacturer's specifications.

## WEAR SEAT BELTS AT ALL TIMES

Read and follow, precisely, all installation instructions provided when installing this product. Failure to do so could place occupants of the vehicle in a potentially dangerous situation. After installing or reinstalling, check to make sure it has been properly installed.

## Installation

### Step One


#### SLIDE SEAT COVER OVER BACK OF SEAT

Orient the Seat Cover with the quilting toward the front of the seat. Slip the opening in the cover over the seat back and pull the cover down to the seat bottom.

Pull Cover over  
back of seat

Pull Web Loop through  
opening in cover

**Note:** Pull the loop sewn to the seat through the opening in the cover.

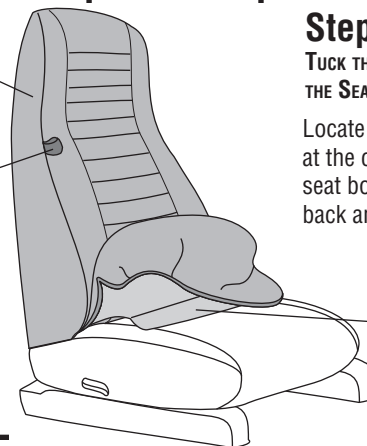

### Step Two

#### TUCK THE CENTER FLAP BETWEEN THE SEAT BACK AND THE SEAT BOTTOM

Locate the flap sewn to the inside of the cover at the corner between the seat back and the seat bottom. Tuck the flap between the seat back and the seat bottom.


Slide flap between  
seat back and seat  
bottom

### Step Three

#### Secure the Flap

Slide the cover over the seat bottom, making sure that the seat adjustment lever on the side of the seat operates freely. Fold the seat back forward. Pull the flap from the previous step through to the back of the seat. Firmly press the hook strip sewn to the flap to the fabric backing inside the bottom of the cover.

Pull flap through and fasten hook to the inside cover

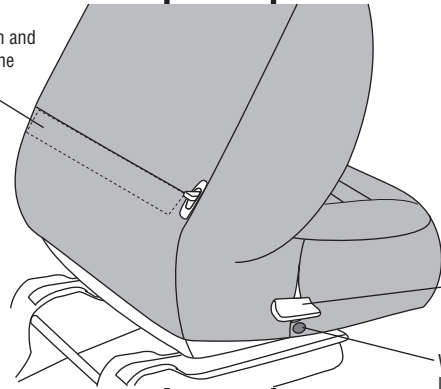

### Step Four

#### Secure the Snap

Make sure that the elastic on the bottom of the cover is around the Seat Adjustment Lever and that the lever operates freely. Fasten the snap to secure the seat cover around the lever.

Seat Adjustment Lever

Work elastic around lever and fasten snap

## LIMITED WARRANTY

We warrant our product to be free from defects in material and workmanship, for terms specified below, provided there has been normal use and proper maintenance. This warranty applies to the original purchaser only. All remedies under this warranty are limited to the repair or replacement of any item or items found by the factory to be defective within the time period specified.

If you have a warranty claim, first you must call our factory at the number below for instructions. You must retain proof of purchase and submit a copy with any items returned for warranty work. Upon completion of warranty work, if any, we will return the repaired or replaced item or items to you freight prepaid. Damage to our products caused by accidents, fire, vandalism, negligence, misinstallation, misuse, Acts of God, or by defective parts not manufactured by us, is not covered under this warranty.

THE WARRANTY TIME PERIOD IS AS FOLLOWS: ALL "GOODS" MANUFACTURED BY OUR COMPANY: ONE YEAR FROM DATE OF PURCHASE.

ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE CREATED HEREBY ARE LIMITED IN DURATION TO THE SAME DURATION AND SCOPE AS THE EXPRESS WRITTEN WARRANTY. OUR COMPANY SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGE.

Some states do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

For further information, please contact:

Bestop Inc.  
Customer Service  
(800)845-3567  
(303)465-1755

