



Truck and Jeep Accessories

www.Daystarweb.com
 Tech Support Contact Info
Tech@DaystarWeb.com
 Phone: 623.907.0081
 Fax: 623.907.0088
 841 South 71st Avenue
 Phoenix, AZ 85043

KJ09181

2018 and Up Jeep Wrangler JL 3/4" Lift



Bill of Materials		
Part Number	Description	Quantity
M09181-01	Front Coil Spring Spacer	2
M09181-02	Rear Coil Spring Spacer	2

Required Tools
Floor Jack
Jack Stands
Wheel Chocks
Metric Tool set



Instructions Sheet INS09181
 2018 Daystar Products International
 Version: 00

Pre-Install Procedure


1. Inspect all components in the kit

Front Installation

2. Chock rear wheels
3. Remove front driver side wheel
4. Support front axle
5. Remove factory sway bar end link



6. Remove factory lower shock mount

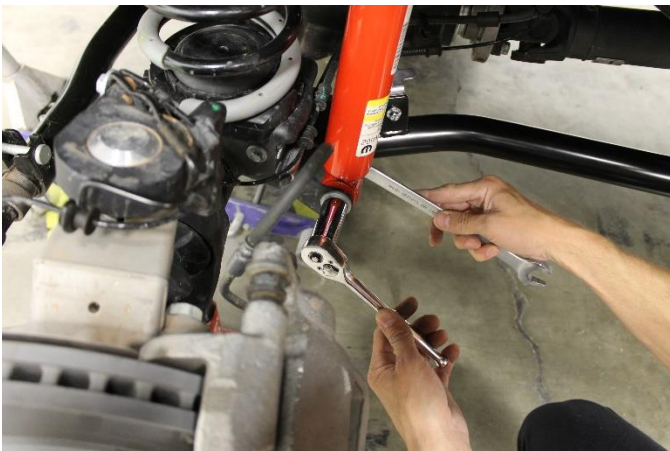


7. Raise Vehicle frame and/or lower front axle to remove factory coil spring
 - a. Unplug or disconnect any clips, hoses, electrical connectors/cables, etc. as necessary



8. Install Daystar top coil spring Spacer
 - a. Color and size may vary




9. Reinstall factory coil spring
 - a. Note factory line up on factory lower coil spring isolator

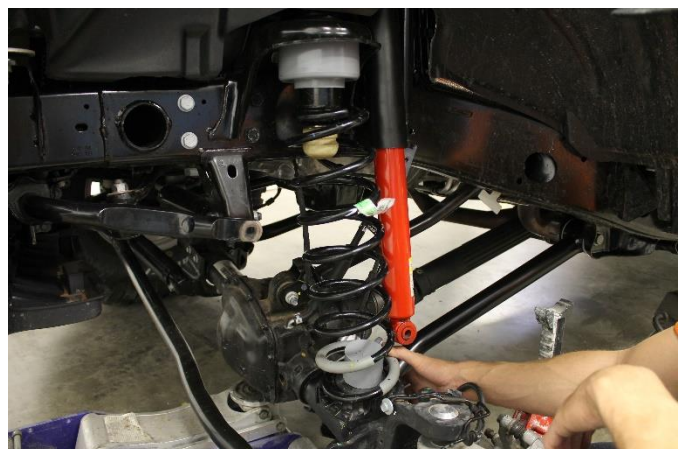

10. Reinstall factory lower shock mount




12. Verify that all bolts are torqued to proper specifications

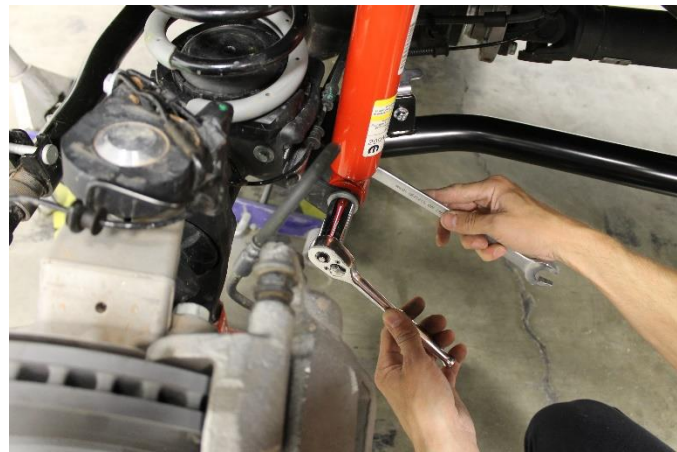

13. Reinstall wheel



11. Reinstall Daystar sway bar end link

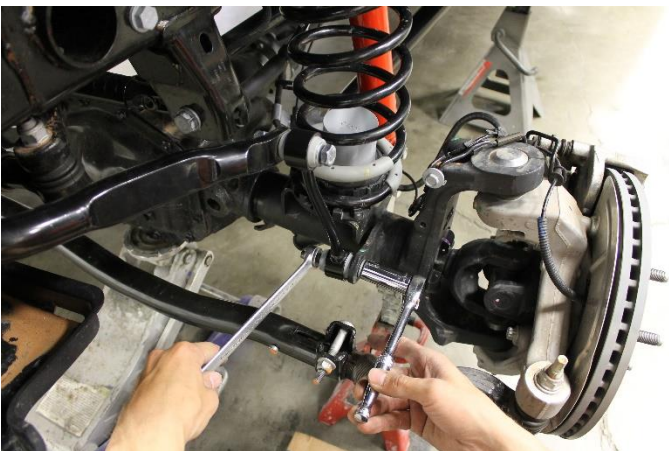

14. Repeat process for passenger side

Rear Installation

15. Chock front wheels
16. Remove rear driver side wheel
17. Support rear axle
18. Remove factory sway bar end link
19. Remove factory lower shock mount



25. Verify that all bolts are torqued to proper specifications



20. Raise Vehicle frame and/or lower rear axle to remove factory coil spring
 - a. Unplug or disconnect any clips, hoses, electrical connectors/cables, etc. as necessary
21. Install Daystar top coil spring Spacer
 - a. Note factory line up on factory upper coil spring isolator
 - b. Color and size may vary



26. Reinstall wheel



22. Reinstall factory coil spring
 - a. Note factory line up on coil spring isolator
23. Reinstall lower shock mount
24. Reinstall factory sway bar end link

27. Repeat process for passenger side

Thank you for choosing Daystar Products

Daystar recommends a certified technician install this system. In addition to these instructions, professional knowledge of disassemble/reassembly procedures as well as post installation checks must be known. Attempts to install this system without this knowledge and expertise may jeopardize the integrity and/or operating of the vehicle.

Please read all the instructions before beginning the installation. Check the kit hardware against the parts list. Be sure you have all the needed parts and understand where they go. If anything is missing, do not proceed with the installation, Call Daystar Products to obtain needed items.

Product Use Information

As a general rule, the taller a vehicle is the easier it will roll. We strongly recommend, because of rollover possibility, that seat belts and shoulder harness be worn at all times. Avoid situations where a side rollover may occur.

Braking performance and capabilities are decreased when significantly large/heavier tires and wheels are used. Take this into consideration while driving. Also, speedometer recalibration is necessary when larger tires are installed.

Do not add, alter, or fabricate any factory or after-market parts which increase vehicle height over the intended height of the Daystar Product purchased. Mixing component brands, lifts, and/or combining body lift with suspension lift voids all warranties. Daystar makes no claims regarding lifting devices and excludes any and all implied claims. We will not be responsible for any products that is altered.

Notice to Dealer and Vehicle Owner

Any vehicle equipped with any Daystar Product must have the "Warning to driver" decal installed on the sun visor or dash. The decal is to act a constant reminder for whoever is operating the vehicle of its unique handling characteristics. **INSTALLING DEALER**— It is your responsibility to install the warning decal and forward these instructions on to the vehicle owner for review and to be kept in the vehicle for service life.

After installation occurs, a qualified alignment facility is required to align the vehicle to factory specs.



Thanks for using our kit!



WARNING

This vehicle has been modified to enhance its performance. The steering, braking and handling of this vehicle will differ from standard passenger cars and trucks. This vehicle handles differently from an ordinary vehicle in driving conditions which may occur on streets, highways and off road. Avoid unnecessary abrupt maneuvers, sudden stops, sharp turns and other driving conditions that could cause loss of control, possibly leading to a roll over or other accident that could result in serious injury or death to driver and passengers. If larger tires are installed the speedometer will read lower than the vehicles actual speed.

DRIVE WITH CARE. REDUCE SPEED AND WEAR SEAT BELTS AT ALL TIMES